



**INDUSTRIAL  
1000BASE-T TO 1000BASE-X  
MEDIA CONVERTERS**

KCD-400 Series

Installation Guide



DOC.190704-KCD-400

(C) 2005 KTI Networks Inc. All rights reserved. No part of this documentation may be reproduced in any form or by any means or used to make any directive work (such as translation or transformation) without permission from KTI Networks Inc.

KTI Networks Inc. reserves the right to revise this documentation and to make changes in content from time to time without obligation on the part of KTI Networks Inc. to provide notification of such revision or change.

For more information, contact:

**United States**

KTI Networks Inc.  
P.O. BOX 631008  
Houston, Texas 77263-1008

Phone: 713-2663891  
Fax: 713-2663893  
E-mail: [kti@ktinet.com](mailto:kti@ktinet.com)  
URL: <http://www.ktinet.com/>

**International**

Fax: 886-2-26983873  
E-mail: [kti@ktinet.com.tw](mailto:kti@ktinet.com.tw)  
URL: <http://www.ktinet.com.tw/>

The information contained in this document is subject to change without prior notice. Copyright (C) All Rights Reserved.


#### TRADEMARKS

Ethernet is a registered trademark of Xerox Corp.

#### FCC NOTICE

This device complies with Class B Part 15 the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received including the interference that may cause.

#### CE NOTICE

Marking by the symbol  indicates compliance of this equipment to the EMC directive of the European Community. Such marking is indicative that this equipment meets or exceeds the following technical standards:

#### EMC Class B

EN55022:2006/A1:2007 Class B

EN61000-3-2:2006 Class A

EN61000-3-3:2008

EN55024:1998/A1:2001/A2:2003

IEC 61000-4-2:2009

IEC 61000-4-3:2006/A1:2008

IEC 61000-4-4:2004

IEC 61000-4-5:2005

IEC 61000-4-6:2009

IEC 61000-4-8:2001

IEC 61000-4-11:2004

# Table of Contents

<b>1. Introduction .....</b>	<b>5</b>
1.1 Features .....	6
1.2 Specifications .....	7
1.3 Special Functions .....	11
<b>2. Installation .....</b>	<b>13</b>
2.1 Unpacking .....	13
2.2 Safety Cautions .....	14
2.3 DIN-Rail Mounting .....	15
2.4 Panel Mounting .....	17
2.5 Applying Power .....	19
2.6 Power Failure Relay Output .....	22
2.7 Making Twisted Pair Copper Port Connection .....	23
2.8 Making Fiber Port Connection .....	24
<b>3 LED Indicators .....</b>	<b>25</b>
3.1 LED Indicators .....	25
<b>Appendix: Model Optical Specifications .....</b>	<b>26</b>

# 1. Introduction

---

The industrial 1000BASE-T to 1000BASE-X media converter series provides industrial strength Ethernet copper-to-fiber media conversion, allowing for 1000Base-T-to-1000Base-X over multi-mode or optional single-mode fiber optical media.



For industrial environment, the converters are designed with the following enhanced features exceeding that of commercial media converters:


- High and wide operating Temperature
- Wide operating voltage range for DC power input
- Power input interface: Industrial screw terminal block and DC power jack for external commercial power adapter as option
- DIN rail mounting support for industrial enclosure
- Screw panel mounting support for industrial enclosure
- Industrial-rated Emission and Immunity performance

## 1.1 Features

- Gigabit copper to fiber conversion: 1000Base-T-to-1000Base-SX/LX over multimode or single-mode fiber
- SFP design : For flexibility, an SFP (Mini-GBIC) connector is provided for the fiber port to accommodate any type of SFP fiber transceiver when needed.
- Support full wire speed copper to fiber conversion
- Auto MDI/MDI-X detection function on the copper port
- Auto-negotiation support
- Plug and play : no configuration settings is required
- Link Fault Pass Through : this function allows link fault status passes through between copper link and fiber link transparently.
- [Remote fault indication support on fiber port](#)
- Transparent conversion to any type of packet frame
- No packet length limitation
- Diversified mounting support : desktop mounting, wall mounting, optional Din-Rail support
- Low power consumption
- Two power interface type: screw terminal block and DC jack
- Wide operating voltage input range : +7 ~ 30VDC
- Support DIN rail mounting
- Support panel mounting
- High and wide operating temperature range : -20°C to 70°C
- Industrial-rated Emission and Immunity performance

## 1.2 Specifications

This figure shows the important components of the converter:

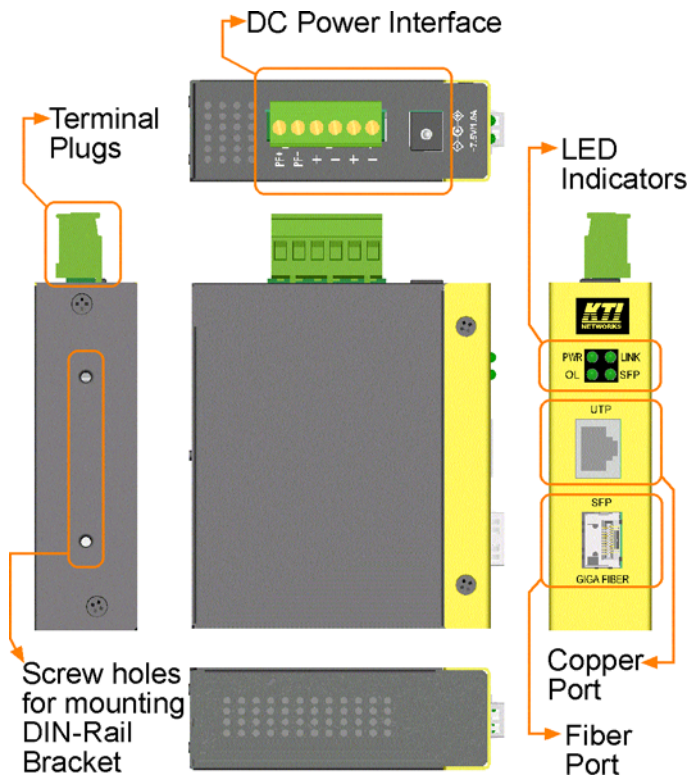

### **Twisted-Pair Interface (Copper Port)**

Connector	Shielded RJ-45
Signal Compliance	IEEE 802.3ab 1000BASE-T std.
Pin Assignments	Auto MDI/MDI-X detection
Data Speed	1000Mbps
Duplex Mode	Half-duplex or Full-duplex
Configuration	Auto-negotiation support
Cable Types	Category 5 or higher UTP
Link Distance	Up to 100 meters

### **Fiber Optic Interface (Fiber Port)**

Signal Compliance	IEEE 802.3z 1000BASE-SX/LX std.
Connector	SFP for pluggable fiber transceiver
Data Speed	1000Mbps
Duplex Mode	Full duplex
Cable Types	MMF - 50/125, 62.5/125 SMF - 9/125
Link Distance	MMF up to 500m SMF -model dependent
Eye Safety compliance	IEC825 Class 1

Refer to Appendix for detailed optical specifications.

### **LED Indicators**

<b>LED</b>	<b>DISPLAY</b>	<b>STATE</b>	<b>INTERPRETATION</b>
PWR	Power status	ON	Power on
		OFF	Power off
SFP	SFP slot status	ON	SFP transceiver is installed.
		OFF	No SFP transceiver is installed.
LINK	Link status	ON	Copper-fiber link up
		OFF	Copper-fiber link down
		BLINK	Copper-fiber link with data traffic
OL	Optical status	ON	Fiber port optical signal detected
		OFF	Fiber port no optical signal



## DC Power Interface

Interface	Screw-type terminal block 1. Two pairs for power wire cascading 2. One pair for power failure relay output
Operating Input Voltages	DC Jack (-D6.3mm/+D2.0mm) +7V ~ +30V(+5%)
Power consumption	2.25W @+7.5VDC input 2.3W @+24VDC input 2.5W @+30VDC input

## Basic Information

Conversion	Full wire speed 1000Mbps - 1,488,00pps at 64-byte packets
Packet Types	Transparent and no modification for - IEEE 802.3 standard packets - IEEE 802.1Q VLAN tagged packets
Packet Length	No limit

## Mechanical

Dimension (base)	W 28mm x D 82mm x H 95mm
Housing	Enclosed metal with no fan
Mounting Support	DIN-rail mounting, Panel mounting
Weight	252g

## Environmental

Operating Temperature	Typical -20°C ~ 70°C (model dependent)
Storage Temperature	-20°C ~ 85°C
Relative Humidity	5% ~ 95%

## **Certificate**

FCC

CE/EMC

CE/LVD Safety

Part 15 Class B

EMI EN55022 Class B

EMS EN55024

EN 60950

EN 50081-1/1992 :

EN55022:2006/A1:2007

EN61000-3-2:2006

EN61000-3-3:2008

EN55024:1998/A1:2001/A2:2003

IEC 61000-4-2:2009 ESD Test

IEC 61000-4-3:2006/A1:2008 RS Test

IEC 61000-4-4:2004 EFT/BURST Test

IEC 61000-4-5:2005 Surge Test

IEC 61000-4-6:2009 CS Test

IEC 61000-4-8:2001 Magnetic Field

IEC 61000-4-11:2004 Volatge Int. Dips


## 1.3 Special Functions

### Auto MDI/MDI-X Function

This function allows the copper port to auto-detect the twisted-pair signals and adapts itself to form a valid MDI to MDI-X connection with the remote connected device automatically.


### Link Fault Pass Through Function

When a link fault is detected on the copper port, the device will force a link down on the fiber port immediately. Similarly, a link fault detected on the fiber port will also force a link down on the copper port. As illustrated in the following figure, this function allows to pass copper link fault to the remote link partner and makes the converter like a twisted pair cable extender.

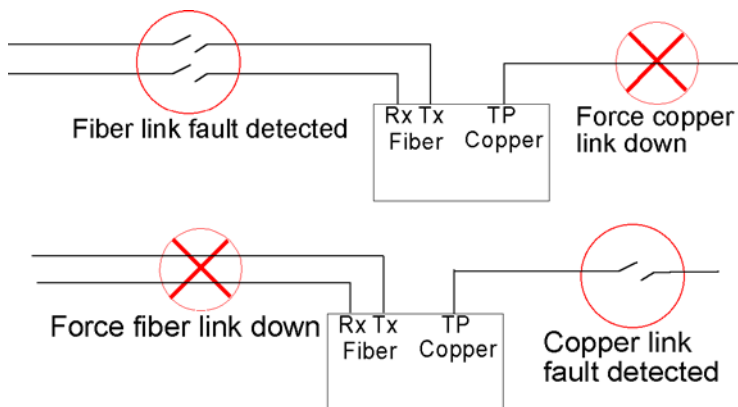

### Remote Fault Indication Function

The fiber port is facilitated with this function. When the fiber port detects a link failure on its receiving circuitry, it will send out remote fault indication (RFI) information to the remote connected device to indicate a remote fault is detected.

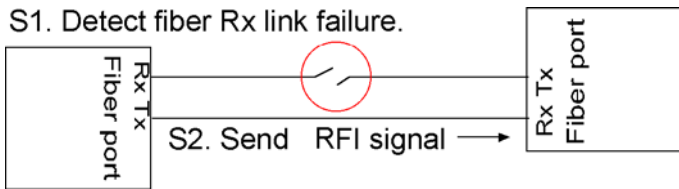

## 2. Installation

---

### 2.1 Unpacking

Check that the following components have been included:

- Information CD
- The Media Converter unit
- DIN-rail mounting bracket

If any item is found missing or damaged, please contact your local reseller for replacement.

The following are available optional accessories:

- Panel Mounting Bracket  
The bracket is used for mounting the converter on a panel surface.
- Commercial-rated AC power adapters:
  - Rated AC120V/60Hz DC7.5V 1A
  - Rated AC230V/50Hz DC7.5V 1A
  - Rated AC100V/50-60Hz DC7.5V 1A
  - Rated AC240V/50Hz DC7.5V 1A

The adapters are used for supplying DC power to the converter via DC power jack interface.

## 2.2 Safety Cautions

To reduce the risk of bodily injury, electrical shock, fire, and damage to the equipment, observe the following precautions.


- Do not service any product except as explained in your system documentation.
- Opening or removing covers may expose you to electrical shock. Only a trained service technician should service components inside these compartments.
- If any of the following conditions occur, unplug the product from the electrical outlet and replace the part or contact your trained service provider:
  - The power cable, extension cable, or plug is damaged.
  - An object has fallen into the product.
  - The product has been exposed to water.
  - The product has been dropped or damaged.
  - The product does not operate correctly when you follow the operating instructions.
- Do not push any objects into the openings of your system. Doing so can cause fire or electric shock by shorting out interior components.
- Operate the product only from the type of external power source indicated on the electrical ratings label. If you are not sure of the type of power source required, consult your service provider or local power company.

## 2.3 DIN-Rail Mounting


In the product package, a DIN-rail bracket is installed on the device for mounting the converter in a industrial DIN-rail enclosure.

The steps to mount the device onto a DIN rail are:


1. Install the mounting bracket onto the device unit as shown below:

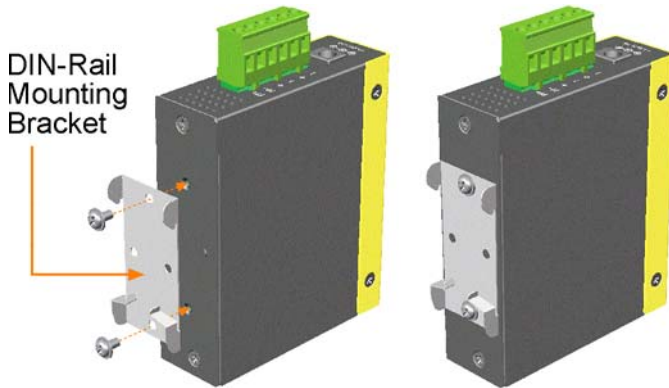

2. Attach bracket to the lower edge of the DIN rail and push the unit upward a little bit until the bracket can clamp on the upper edge of the DIN rail.
3. Clamp the unit to the DIN rail and make sure it is mounted securely.
4. Make sure that there are proper heat dissipation from and adequate ventilation around the device.

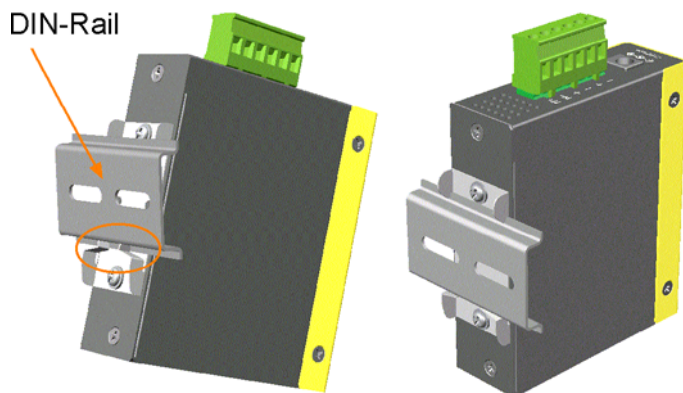

The final mechanical dimensions after installing DIN rail mounting bracket are:

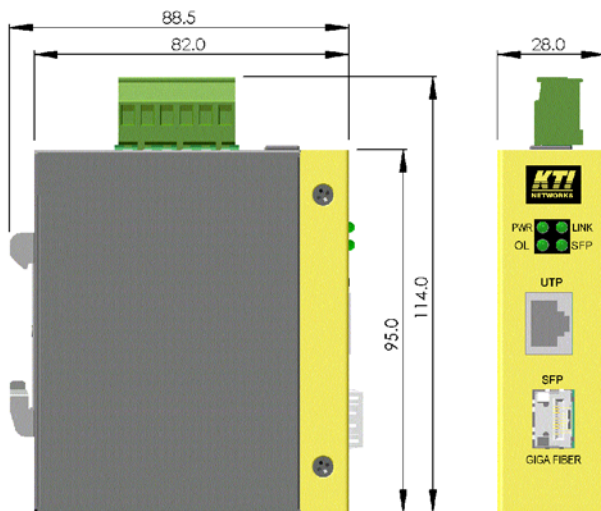




## 2.4 Panel Mounting


The device is provided with an optional panel mounting bracket. The bracket support mounting the device on a plane surface securely. The mounting steps are:

1. Install the mounting bracket on the device unit.
2. Screw the bracket on the device unit.

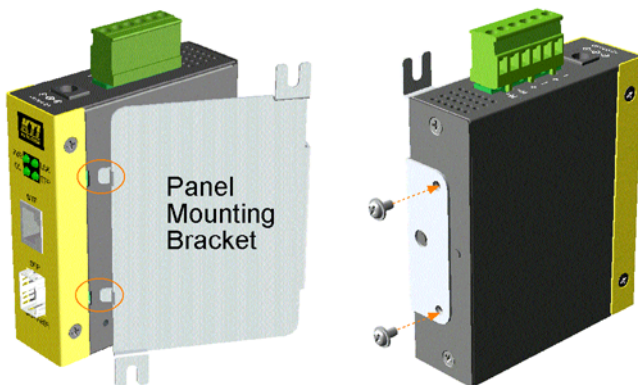

3. Screw the device unit on a panel.
4. Make sure that there are proper heat dissipation from and adequate ventilation around the device. Do not place heavy objects on the device.

The screw locations and final dimension are shown below:

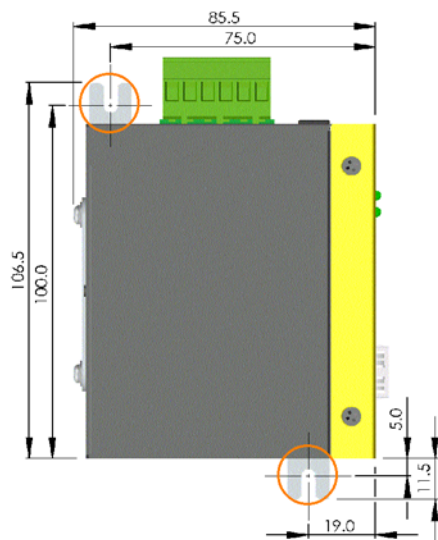


## 2.5 Applying Power

The power specifications of the device are:

Operating Voltage +7~+30VDC

Power Consumption Max. 2.5W @30VDC

The device provides two types of power interfaces, terminal block and DC power jack for receiving DC power input from external power supply.

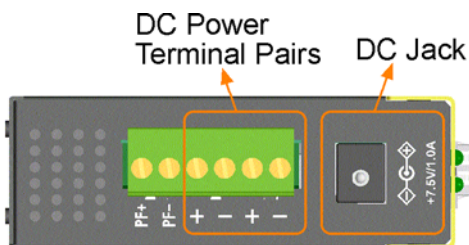

### Using Terminal Blocks

Either DC1 interface or DC2 interface can be used to receive DC power from an external power system. Or, DC2 also can be used to deliver the power received on DC1 to next device in cascading way.

DC1 +        Vdc Positive (+) terminal

DC1 -        Vdc Negative (-) terminal

DC2 +        Vdc Positive (+) terminal

DC2 -        Vdc Negative (-) terminal

Three 2P terminal plugs are provided together with the device. Two of the three plugs are used for DC1 and DC2 interfaces respectively. The plug is shown below:



Power wires: 24 ~ 12AWG (IEC 0.5~2.5mm<sup>2</sup>)


Install the power source wires with the plug properly. Screw the wire with plug securely. Then, plug in DC1 contacts.




If cascading the power to next device is needed, install the power wires and plug for another switch. Then, use DC2 contacts.

*Note: Only up to four device units can be cascaded to receive power from one main power input source.*

## Using DC Power Jack

DC Jack Connector: Jack D 6.3mm —  + D 2.0mm

AC Power Adapters: Optional commercial rated adapters are available for purchasing.



Rated AC120V/60Hz DC7.5V 1A

Rated AC230V/50Hz DC7.5V 1A

Rated AC100V/50-60Hz DC7.5V 1A

Rated AC240V/50Hz DC7.5V 1A


Connect power adapter DC plug to the DC power jack of the converter before connecting to the AC outlet. Connect the power adapter to the AC outlet.



*Note: Before you begin the installation, check the AC voltage of your area. The AC power adapter which is used to supply the DC power for the unit should have the AC voltage matching the commercial power voltage in your area.*

## 2.6 Power Failure Relay Output

The device provides a relay output to report power failure event to a remote alarm monitoring system. The relay output is provided with two contacts labeled **PF+** and **PF-** in the terminal block interface.

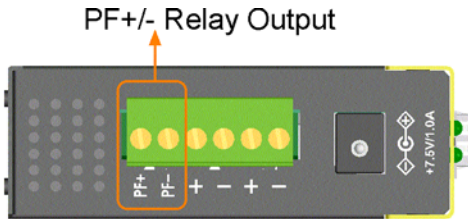


Use the provided 2P terminal plug for signal wiring and plug into the PF+/- contacts. The function is designed as :

Power is normal: PF+ / PF- disconnected (Open)

Power failure: PF+ / PF- connected (Short)

*Note: Be sure the voltage applied on PF+/- contacts is within the specification of 30VDC/1A max. or 120VAC/0.5A max.*

## 2.7 Making Twisted Pair Copper Port Connection

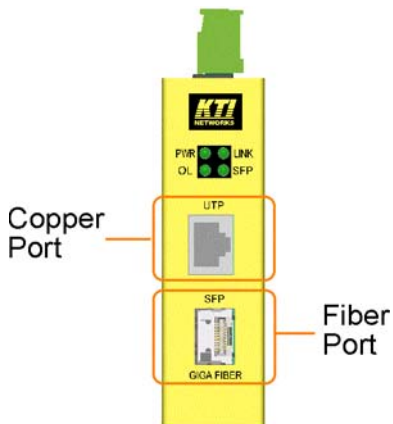

Copper port is featured to support connection to :

- Auto-negotiation 1000BASE-T devices

### Network Cables

1000BASE-T: 4-pair UTP Cat. 5e or 6, EIA/TIA-568B 100-ohm STP

Link distance: Up to 100 meters

*Note: The copper port is featured with auto MDI/MDI-X crossover detection and configuration function. No matter a straight through cable or crossover cable is connected, the copper port can sense the receiving pair automatically and configure itself to match the connection.*

## 2.8 Making Fiber Port Connection


The mini-GBIC (SFP) port must be installed with an SFP fiber transceiver for making fiber connection. The device may come with an SFP transceiver pre-installed when it is shipped from factory.

### Installing SFP Fiber Transceiver

Turn off the power to the device. Insert the SFP fiber transceiver into the mini-GBIC port. Normally, a bail is provided for every SFP transceiver. Hold the bail and make insertion. Until the SFP transceiver is seated securely in the slot, place the bail in lock position.

### Connecting Fiber Cables

LC connectors are commonly equipped on most SFP transceiver modules. Identify TX and RX connector before making cable connection. The following figure illustrates a connection example between two fiber ports:

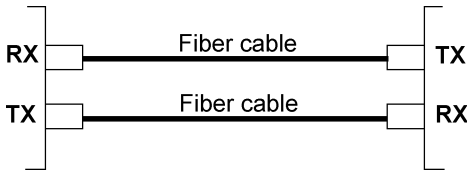

Make sure the RX-to-TX connection rule is followed on the both ends of the fiber cable.

*Note: For Bi-Di (Bidirectional) SFP transceivers which use two different wavelengths for TX and RX respectively over single fiber cable, only one connector is provided on the fiber port and only one fiber cable is used.*

### Network Cables

Multimode (MMF) - 50/125, 62.5/125


Single mode (SMF) - 9/125



## 3 LED Indicators

---

The following figure shows the locations of the configuration switches and LED indicators:

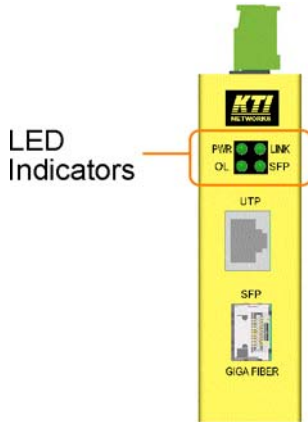

### 3.1 LED Indicators

<b>LED</b>	<b>DISPLAY</b>	<b>STATE</b>	<b>INTERPRETATION</b>
PWR	Power status	ON	The device is powered on.
		OFF	The device is powered off.
SFP	SFP slot status	ON	An SFP transceiver is installed.
		OFF	No SFP transceiver is installed.
LINK	Link status	ON	Copper-fiber link up
		OFF	Copper-fiber link down
		BLINK	Copper-fiber link with data traffic
OL	Optical status	ON	Fiber port optical signal detected
		OFF	Fiber port no optical signal

## Appendix: Model Optical Specifications

---

The media converter series provides the following fiber options:

### Model Specifications

<b>KCD-400-xx</b>	<b>FX</b>	<b>Wavelength</b>	<b>Reference Fiber Distance</b>	<b>Operating Temperature</b>
-SX	LC	850nm	50/125 MMF 500m 62.5/125 MMF 200m	-20 ~ 70°C
-LX	LC	1310nm	MMF 550m SMF 10km	-20 ~ 70°C
-LX20	LC	1310nm	SMF 20km	-20 ~ 70°C
-LX110	LC	1550nm	SMF 110km	-20 ~ 70°C

### Optical Specifications

<b>KCD-400-xxx</b>	<b>FX</b>	<b>Tx Power</b>	<b>Sensitivity</b>	<b>Max. Rx Power</b>
-SX	LC	-9.5 ~ -4 dBm	-18dBm	0 dBm
-LX	LC	-9.5 ~ -3 dBm	-20dBm	-3 dBm
-LX20	LC	-8 ~ -2 dBm	-23dBm	-1 dBm
-LX110	LC	0 ~ +5 dBm	-30dBm	-8 dBm