

## ■ Features


- 85~264Vac input with PFC
- Global certificates in multi-fields (ITE 62368-1, Industrial 61558-1/-2-16, 61010)
- 48mm slim width
- High efficiency up to 96% and no load power dissipation <1.2W
- Built-in constant current limiting circuit
- Current sharing up to 1920W (3+1) for parallel use
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fanless design, cooling by free air convection
- Over voltage category III (OVC III)
- -40~+70°C wide range operation temperature (>+50°C derating)
- Operating altitude up to 5000 meters
- Built-in DC OK relay contact
- Can be installed on DIN rail TS-35/7.5 or 15
- 3 years warranty

## ■ Description

The XDR-480E series is a 480W AC/DC economical ultra slim industrial DIN rail power. Key features of this series include a narrow 48mm casing, optimizing system installation space, and an ultra-wide input range of 85~264Vac suitable for global use. It boasts a maximum efficiency of 96% and a low standby power consumption <1.2W for energy savings and carbon reduction. It has built-in constant current, fanless design, a wide operating temperature range of -40 to +70°C (up to +50°C at full load); OVCIII compliance; parallel function capability up to 1920W; built-in DC OK signal. With comprehensive protection functions, complete safety certifications, and a 3-years warranty, the XDR-480E series is a compact, high-performance, and highly reliable DIN rail power supply.

## ■ Model Encoding

**XDR - 480E - 24**

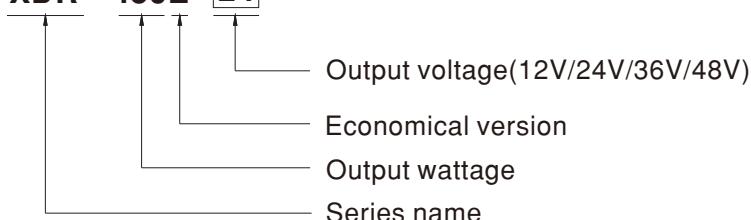

## ■ Applications

- Industrial control system
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus
- Battery charger

## ■ GTIN CODE




MW Search: <https://www.meanwell.com/serviceGTIN.aspx>



SPECIFICATION	XDR-480E-12	XDR-480E-24	XDR-480E-36	XDR-480E-48
<b>OUTPUT</b>				
DC VOLTAGE	12V	24V	36V	48V
RATED CURRENT	30A	20A	13.3A	10A
CURRENT RANGE	0 ~ 30A	0 ~ 20A	0 ~ 13.3A	0 ~ 10A
RATED POWER	360W	480W	478.8W	480W
RIPPLE & NOISE (max.)	Note.2 100mVp-p	120mVp-p	150mVp-p	150mVp-p
VOLTAGE ADJ. RANGE	12 ~ 15V	24 ~ 29V	36 ~ 42V	48 ~ 55V
VOLTAGE TOLERANCE	Note.3 $\pm 2.0\%$	$\pm 1.0\%$	$\pm 1.0\%$	$\pm 1.0\%$
LINE REGULATION	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.5\%$	$\pm 0.5\%$
LOAD REGULATION	$\pm 1.0\%$	$\pm 1.0\%$	$\pm 1.0\%$	$\pm 1.0\%$
SETUP, RISE TIME	1500ms, 150ms/230Vac	3000ms, 150ms/115Vac at full load		
HOLD UP TIME (Typ.)	15ms/230Vac	15ms/115Vac at full load		
<b>INPUT</b>				
AC VOLTAGE RANGE	85 ~ 264Vac			
DC VOLTAGE RANGE	120 ~ 370Vdc			
NO LOAD POWER CONSUMPTION (Typ.)	1W @115Vac & 230Vac		1.2W @115Vac & 230Vac	
FREQUENCY RANGE	47 ~ 63Hz			
POWDR FACTOR (Typ.)	PF>0.95/230Vac	PF>0.98/115Vac at full load		
EFFICIENCY (Typ.)	94%	95.5%	95.5%	96%
AC CURRENT (Typ.)	6A/115Vac	3A/230Vac		
INRUSH CURRENT (Typ.)	COLD START 15A/115Vac	30A/230Vac		
LEAKAGE CURRENT	<1mA / 240Vac			
<b>PROTECTION</b>				
OVERLOAD	105~130% rated output power			
	Hiccup mode when output voltage <30%, recovers automatically after fault condition is removed Constant current limiting without shutdown within 30%~100% rated output voltage, recovers automatically after fault condition is removed			
OVER VOLTAGE	Max. 18V	Max. 35V	Max. 50V	Max. 63V
	Protection type : Hiccup mode, recovers automatically after fault condition is removed.			
OVER TEMPERATURE	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down			
<b>FUNCTION</b>				
PARALLEL (Droop Mode)	Up to 1920W Max (3+1) units; Please refer to Function Manual for more details			
DC OK RELAY CONTACT	Relay Contact Ratings (max.): 30Vdc/1A, 30Vac/0.5A resistive load			
<b>ENVIRONMENT</b>				
WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")			
WORKING HUMIDITY	20 ~ 95% RH non-condensing			
STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing			
TEMP. COEFFICIENT	$\pm 0.03\% / ^\circ C$ (0 ~ 50°C)			
VIBRATION	Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6			



<b>SPECIFICATION</b>		XDR-480E-12	XDR-480E-24	XDR-480E-36	XDR-480E-48							
<b>SAFETY &amp; EMC</b>		Note.6&7&8										
<b>SAFETY STANDARDS</b>		CB IEC 62368-1, IEC 61558-1/2-16, IEC 61010-1/-2-201 TUV BS EN/EN 62368-1, BS EN /EN 61558-1/-2-16, BS EN/EN 61010-1/-2-201 UL UL/CUL 61010-1/-2-201 CCC GB4943.1 BSMI CNS15598-1 EAC TPTC004 approved KC/BIS KC 62368-1 and BIS IS 13252 (Part 1) certified, no stock by request ,contact sales for inquires										
<b>OVER VOLTAGE CATEGORY</b>	Note.4	IEC/EN 61558-1/-2-16 (OVC III, altitude up to 2000m ) IEC/EN/UL 61010-1/-2-201 (OVC II, altitude up to 5000m ) IEC/EN 62368-1 (OVC II, altitude up to 5000m )										
<b>SAFETY EXTRA-LOW VOLTAGE(SELV)</b>		IEC/EN 61558-2-16 (SELV ) IEC/EN 62368-1 (SELV / ES1 )										
<b>WITHSTAND VOLTAGE</b>		I/P-O/P: 4KVac I/P-FG: 2KVac O/P-FG: 1.5KVac O/P-DC OK: 0.5KVac										
<b>ISOLATION RESISTANCE</b>		I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500Vdc/25°C / 70%RH										
<b>EMC EMISSION</b>	Parameter	Standard	<b>Test Level / Note</b>									
	Conducted	BS EN/EN55032 (CISPR32) / BS EN/EN61204-3 / CNS15936 / KS C 9832	Class B									
	Radiated	BS EN/EN55032 (CISPR32) / BS EN/EN61204-3 / CNS15936 / KS C 9832	Class B									
	Harmonic Current	BS EN/EN61000-3-2	Class A									
	Voltage Flicker	BS EN/EN61000-3-3	----									
<b>EMC IMMUNITY</b>	BS EN/EN55035 , BS EN/EN1204-3, BS EN/EN61000-6-2(BS EN/EN50082-2), KS C 9835											
	Parameter	Standard	<b>Test Level / Note</b>									
	ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact; criteria A									
	Radiated	BS EN/EN61000-4-3	Level 3, 10V/m ; criteria A									
	EFT / Burst	BS EN/EN61000-4-4	Level 3, 2KV ; criteria A									
	Surge	BS EN/EN61000-4-5	Level 4, 2KV/Line-Line ;Level 4, 4KV/Line-Line-Chassis ;criteria A									
	Conducted	BS EN/EN61000-4-6	Level 3, 10V ; criteria A									
<b>OTHERS</b>		Magnetic Field	Level 4, 30A/m ; criteria A									
<b>MTBF</b>	1482.0K hrs min.	Telcordia SR-332 (Bellcore) ;	258.3K hrs min.	MIL-HDBK-217F (25°C)								
<b>DIMENSION</b>	<b>48*125.2*125mm (W*H*D)</b>											
<b>PACKING</b>	890g; 12pcs/13Kg/1.16CUFT											
<b>NOTE</b>												
1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature.												
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 μ F & 47 μ F parallel capacitor.												
3. Tolerance : includes set up tolerance, line regulation and load regulation.												
4. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).												
5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended.												
6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. (as available on <a href="https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf">https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf</a> )												
7. The Regulatory Compliance Mark (RCM) is applied on a voluntary basis. The equipment meets the relevant IEC or AS/NZS standards, or AS/NZS 3820 where applicable The use of the RCM mark complies with AS/NZS 4417.1.												
8. Some factory or model may not have the BIS logo, please contact your MEAN WELL sales for more information.												
※ Product Liability Disclaimer : For detailed information, please refer to <a href="https://www.meanwell.com/serviceDisclaimer.aspx">https://www.meanwell.com/serviceDisclaimer.aspx</a>												

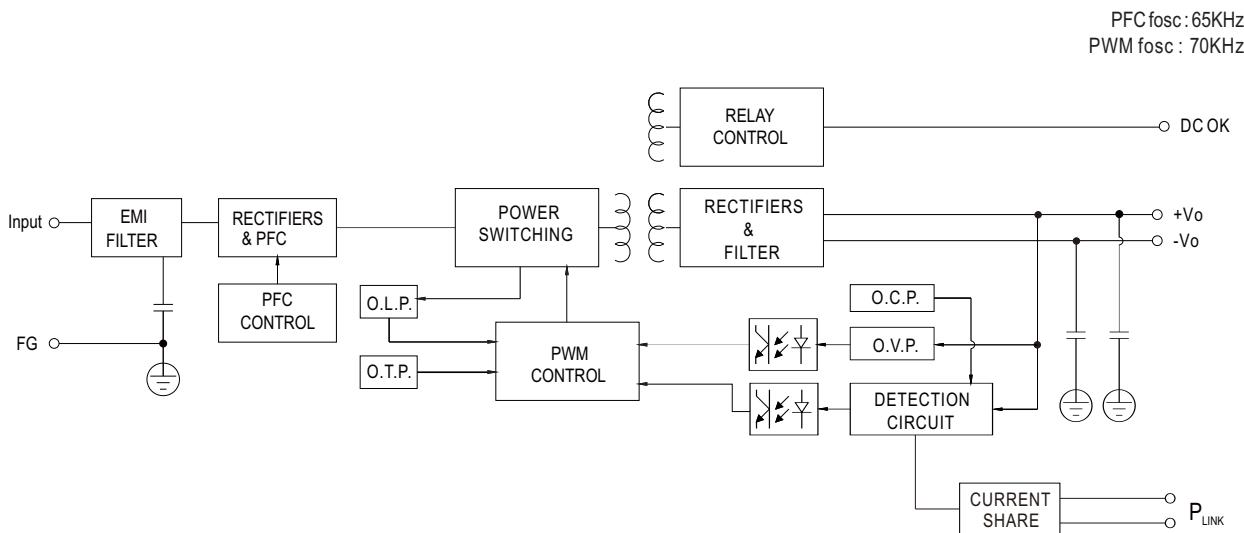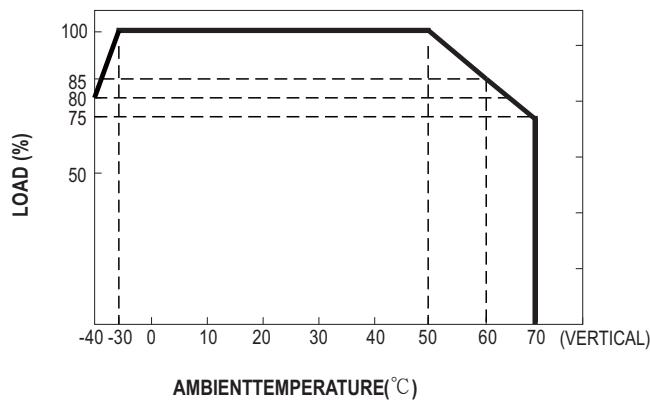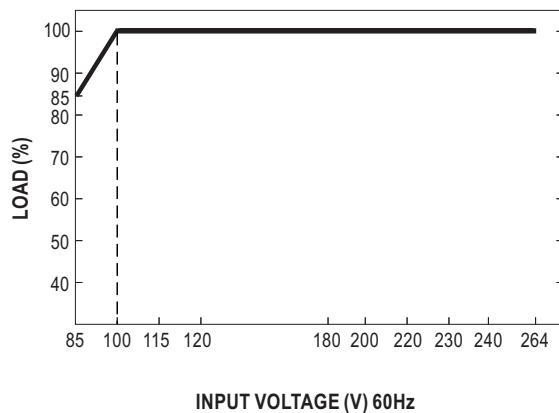
**Block Diagram**

**Derating Curve**

**Static Characteristics**


## ■ Function Manual

Pin No.	Function	Description
1,2	DC OK Relay Contact	Contact Close: PSU turns ON/DC_OK Contact Open: PSU turns OFF/DC_fail
3,4	Paraller Use Link( $P_{LINK}$ )	$P_{LINK}$ should be short to enable droop parallel use. (Default disable)
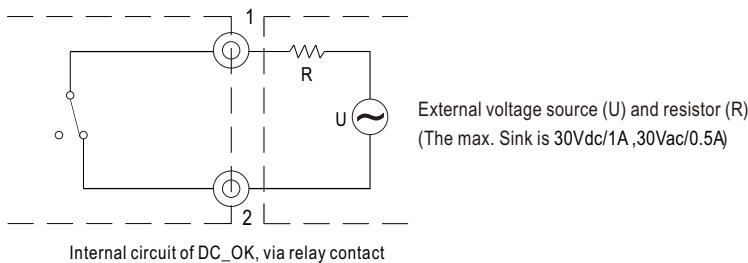
### 1.DC OK Relay Contact

Contact Close	PSU turns ON / DC OK.
Contact Open	PSU turns OFF / DC Fail.
Contact Ratings (max.)	30Vdc/1A, 30Vac/0.5A resistive load.



### 2.Parallel Use

XDR-480E has the built-in [droop mode current sharing](#) function and can be connected in parallel, up to 4 units, to provide higher output power as exhibited below :

- (1) Difference of output voltages among parallel units should be less than [0.1V](#).
- (2) The total output current must not exceed the value determined by the following equation (Output current at parallel operation)=(The rated current per unit) x (Number of unit) x 0.9.
- (3) In parallel operation 4 units is the maximum, please consult the manufacture for other applications.
- (4) The power supplies should be paralleled using short and large diameter wiring and then connected to the load.
- (5) When in parallel operation, the minimum output load should be greater than 7% of total output load. (Min. load >7% rated current per unit x number of unit)
- (6) In parallel connection, maybe only one unit (master) operate if the total output load is less than 7% of rated load condition.

The other PSUs (slaves) may go into standby mode and their output LEDs & relays will not turn on.




- (7) [P<sub>LINK</sub> lines should be shorted locally](#).
- (8) In parallel operation, after overload or short circuit fault occurs, re-power on to recover.
- (9) The "Parallel Use" mode regulates the output voltage in such a manner that the rated load is approx. 4% lower than the no-load voltage (12V:approx.7%).

For example XDR-480E-24:


No load output voltage=24V

Normal load output current=20A

0~100% load output voltage=24V~23V

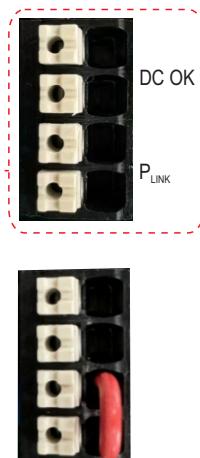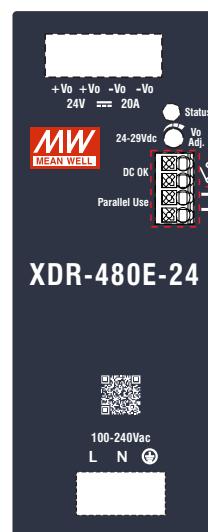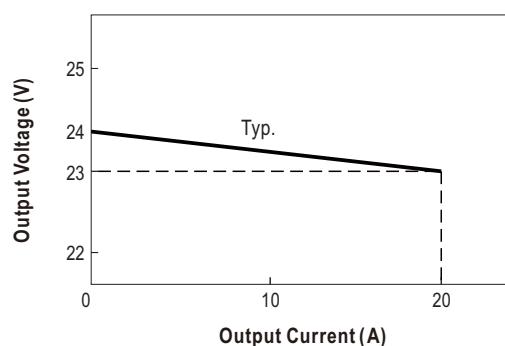

Enable :  $P_{LINK}$  should be short

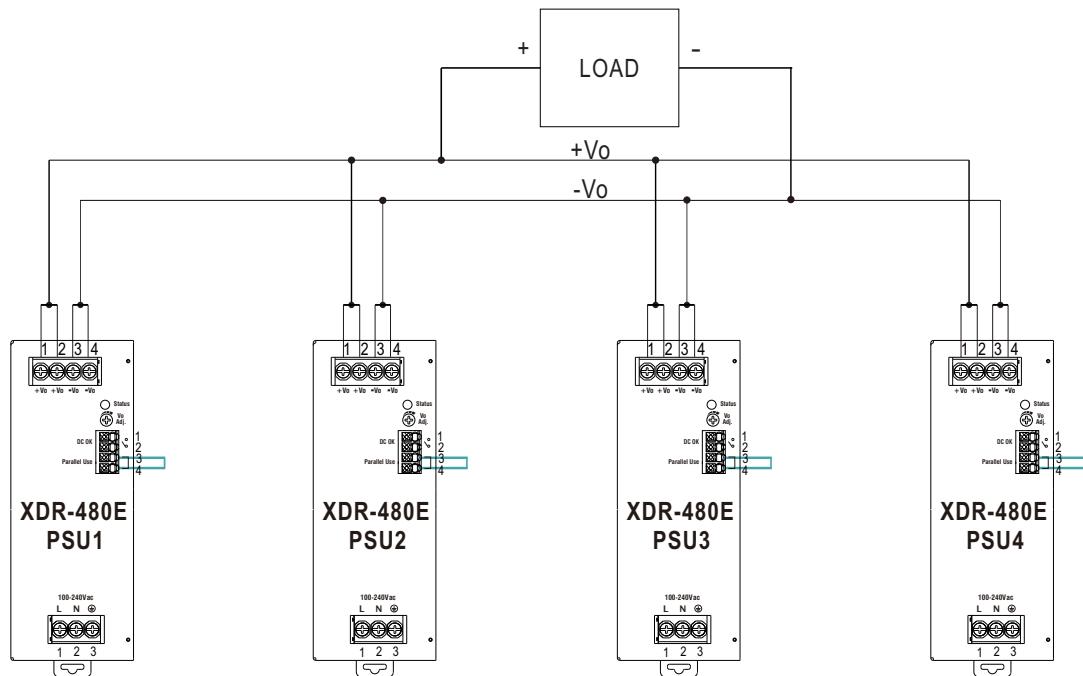


※ Please contact MEAN WELL for more details.

### ■ Mechanical Specification

(Unit:mm , Tolerance  $\pm 1$ mm)

Case No.303




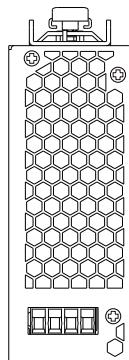


Ⓐ : Terminal Pin No.Assignment

Pin No.	Assignment
1,2	DC Output +Vo
3,4	DC Output -Vo

Ⓑ : Control Pin No.Assignment

Pin No.	Assignment
1,2	DC OK Relay Contact
3,4	Parallel Use Link(Current Sharing)

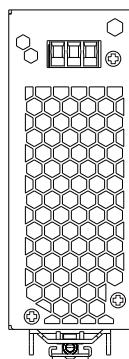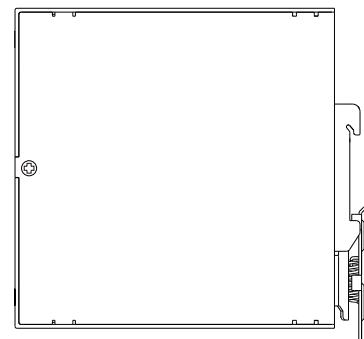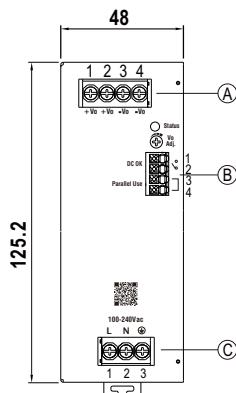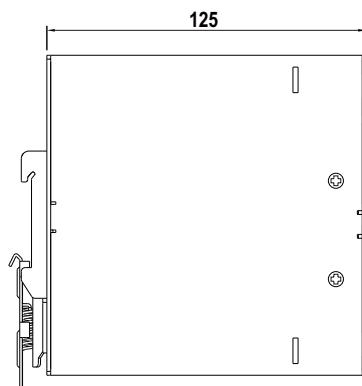

Ⓒ : Terminal Pin No.Assignment

Pin No.	Assignment
1	AC/L or DC Input +Vin
2	AC/N or DC Input -Vin
3	FG $\ominus$


### ■ Recommend Wiring

		AC Input T.B	DC Output T.B	Signal connector
Solid Wire		6mm <sup>2</sup> max.	6mm <sup>2</sup> max.	1.5mm <sup>2</sup> max.
A.W.G	XDR-480E-12	18~10 AWG	12~10 AWG	24~16 AWG
	XDR-480E-24/36/48		16~10 AWG	
Wire Stripping Length		10~11mm	10~11mm	8~9mm
Screw Terminal Torque		5 Lb-In	5 Lb-In	/



480W AC/DC Economical Ultra Slim Industrial DIN Rail Power **XDR-480E** series

### ■ Installation Instruction

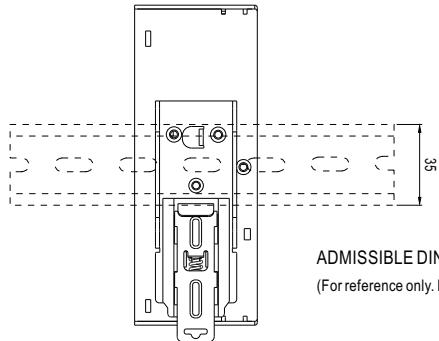

This series fits DIN rail TS35/7.5 or TS35/15.  
For installation details, please refer to the Instruction manual.

ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15  
(For reference only. Not included with unit.)

### ■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>