





KSD-103-A, KSD-103-B



Industrial 3-Port L2 Fast Ethernet Media Converter Switches



Panel Mounting Bracket
PMB-400



The industrial rated KSD-103 Fast Ethernet switch series supports three switching-base segment communications and benefit the following applications and make fiber deployment easier:

- Copper to fiber bridging converter
- Multimode fiber to single mode fiber bridging converter
- Fiber cable extender
- Cascaded fiber networking

Key Features:

- Provide 3 switching-base network segments
- Auto MDI/MDI-X crossover function on the TP copper port
- Support IEEE 802.3x flow control for full-duplex operation
- Support Back-pressure flow control for half-duplex operation
- Wide operating temperature range for temperature critical environment
- Support DIN-rail mounting and panel mounting
- Provide two power input types to meet more application needs
- Accept wide power input voltage range for application flexibility
- Industrial-rated Emission and Immunity performance

Specifications:

Forwarding Method	Store-and-forward, Full wire speed switching
Packet Size	Support 1536 bytes max.
Packet Types	Transparent conversion with no modification to: <ul style="list-style-type: none"> - Standard IEEE 802.3 Ethernet packet frames - IEEE 802.1Q tagged packet frames - RSTP packet frames
TP Port	Shielded RJ-45 jack Auto MDI/MDI-X crossover function, auto-negotiation function Supports Cat.5, 5e or higher UTP cable up to 100m
Fiber (FX) Port	Multimode ST, SC, Single mode SC, Bi-directional SC MMF 50/125µm, 62.5/125µm fiber cable, SMF 9/125µm cable 100Mbps Full-duplex, Far End Fault Indication support
Model Definition	KSD-103-A: 2 TP ports, 1 FX port, KSD-103-B: 1 TP port, 2 FX ports
Flow Control	IEEE 802.3x for Full-duplex, Back pressure for Half-duplex
LEDs	Power status, Port link/activity
DC Power Input	Screwed terminal block: 2 pairs of +/- contacts DC jack: -D 6.3mm/+D 2.0mm Voltage range: +7 ~ +50VDC, 4W max. @50V DC IN
Relay Output	Alarm events: power failure, specific fiber port link fault Interface: 2 terminal contacts (30VDC/1A max. or 120VAC/0.5A max.)
Dimension	28 x 82 x 95 mm, Weight: 250g



Ordering Information:

Model	KSD-103-A FX KSD-103-B FX1 FX2	Ref. Distance	Operating Temperature
-T	ST MMF	2km	-30°C ~ 70°C
-C	SC MMF	2km	-30°C ~ 70°C
-SL2	SC SMF	20km	-30°C ~ 70°C
-SL3	SC SMF	30km	-30°C ~ 70°C
-SL4	SC SMF	40km	-30°C ~ 70°C
-SL6	SC SMF	60km	-30°C ~ 70°C
-W3520	Bi-Di SC SMF	20km	-30°C ~ 70°C
-W5320	Bi-Di SC SMF	20km	-30°C ~ 70°C
-CSL2	FX1: SC MMF FX2: SC SMF	2km 20km	-30°C ~ 70°C

EMI EMS Safety Environmental Tests:


Test	Standard	Specifications
FCC/EMI	FCC Rule Part 15	Class B
CE/EMC/EMI	EN55022, CISPR 22	Class B
CE/EMC/Harmonic	EN 61000-3-2	< 75 W
CE/EMC/VFF	EN 61000-3-3	Clause 5
CE/EMC/EMS	EN 55024	
ESD Test	IEC 61000-4-2	Contact: +/-4kV Air: +/-8kV
RS Test	IEC 61000-4-3	Strength: 10V/m
EFT/BURST	IEC 61000-4-4	Level 3 Power: +/-2kV Signal: +/-1kV
Surge Immunity	IEC 61000-4-5	Power: 2kV Signal: 1kV
CS Test	IEC 61000-4-6	Level 3
Magnetic Field Imm.	IEC 61000-4-8	50Hz 100A/m
Voltage Dips Imm.	IEC 61000-4-11	Interruption: C Dips: B
Safety	EN 60950, IEC 60950	
Dielectric Voltage	IEEE 802.3	TP, 1500VAC/60sec.
Insulation Resistance	IEEE 802.3	TP, 500VDC/10Mohm
Cold Test	IEC 60068-2-1 Ad	-20°C, 96hrs
Dry Heat Test	IEC 60068-2-2 Bd	+70°C, 40%RH, 96hrs
Damp Heat Test	IEC 60068-2-3 Ca	+60°C, 90%RH, 96hrs
Storage Test	IEC 60068-2-48	-20°C, 96hrs +85°C, 40%RH, 96hrs
Vibration Test	IEC 60068-2-64 Fh	10-200Hz, 0.1g/Hz 200-500Hz, 0.03g/Hz

Housing	Enclosed metal with no fan
Mounting Support	DIN-Rail mounting, Panel mounting
Temperature	Operating Temperature: -30°C ~ 70°C Storage Temperature: -40°C ~ 85°C Relative Humidity: 5% ~ 95% non-condensing
Approval	FCC Class B, CE mark Class B, EN60950-1 safety

Fiber Optical Specifications:


Model	FX & Cable	Wavelength	Tx Power*	Rx Sens.	Rx Max.
KSD-103-A-xxx & KSD-103-B-xxx					
-T	ST MMF	1310nm	-20 ~ -14dBm	-31dBm	-8dBm
-C	SC MMF	1310nm	-20 ~ -14dBm	-31dBm	-8dBm
-SL2	SC SMF	1310nm	-15 ~ -8dBm	-30dBm	-7dBm
-SL3	SC SMF	1310nm	-15 ~ -8dBm	-34dBm	0dBm
-SL4	SC SMF	1310nm	-5 ~ 0dBm	-34dBm	0dBm
-SL6	SC SMF	1310nm	-5 ~ 0dBm	-35dBm	0dBm
-W3520	Bi-Di SC SMF	TX 1310nm RX 1550nm	-14 ~ -8dBm	-31dBm	0dBm
-W5320	Bi-Di SC SMF	TX 1550nm RX 1310nm	-14 ~ -8dBm	-31dBm	0dBm
KSD-103-B-xxx					
-CSL2	FX1: SC MMF FX2: SC SMF	1310nm 1310nm	-20 ~ -14dBm -15 ~ -8dBm	-31dBm -30dBm	-8dBm -7dBm

* Data for 62.5/125µm MMF, 9/125µm SMF

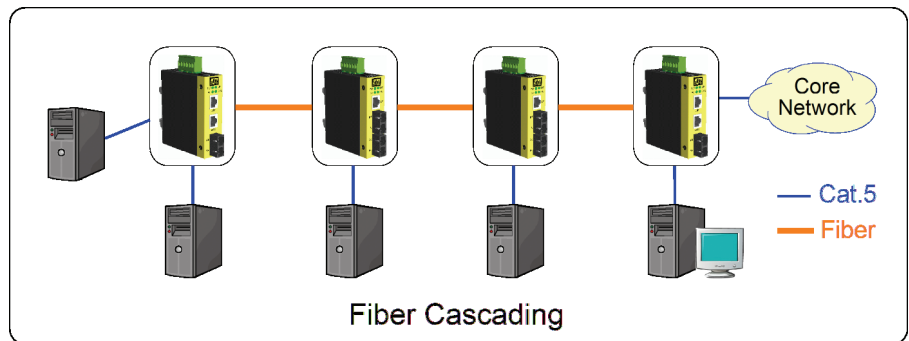


Katron Technologies Inc.
15F-7, No. 79, Sec. 1, Hsin Tai Wu Rd.,
Hsi-chih District, New Taipei City, Taiwan
Tel: 886-2-2698-3878
Fax: 886-2-2698-3873
E-mail: kti@ktinet.com.tw
URL: http://www.ktinet.com.tw

Trademarks: All brand names are trademarks or registered trademarks of their respective holders. This information is subject to change without prior notice.

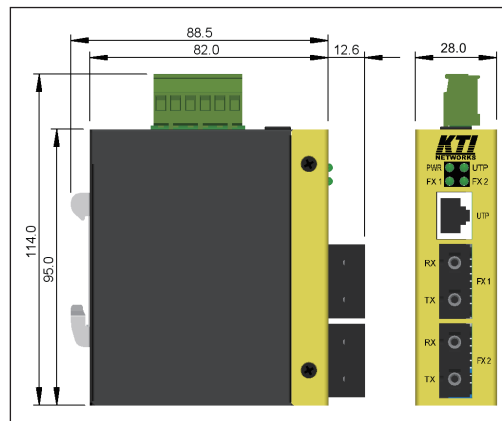

DIN-Rail Dimension

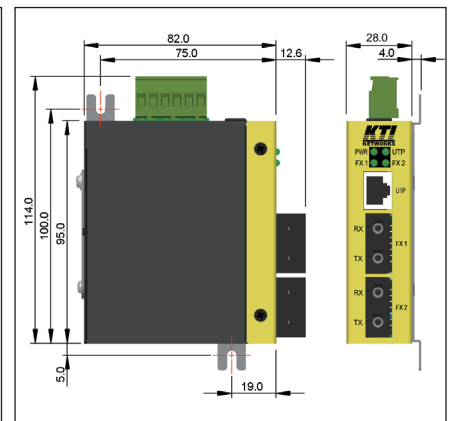

Panel Dimension