



# **KPW-2012-D-E**

## **Din-Rail AC-DC 12V Power Supply**

### User's Manual



DOC.131114

(C) 2009-2013 KTI Networks Inc. All rights reserved. No part of this documentation may be reproduced in any form or by any means or used to make any derivative work (such as translation or transformation) without permission from KTI Networks Inc.

KTI Networks Inc. reserves the right to revise this documentation and to make changes in content from time to time without obligation on the part of KTI Networks Inc. to provide notification of such revision or change.

For more information, contact:

**United States**      KTI Networks Inc.  
P.O. BOX 631008  
Houston, Texas 77263-1008

Phone: 713-2663891  
Fax: 713-2663893  
E-mail: [kti@ktinet.com](mailto:kti@ktinet.com)  
URL: <http://www.ktinet.com/>

**International**      Fax: 886-2-26983873  
E-mail: [kti@ktinet.com.tw](mailto:kti@ktinet.com.tw)  
URL: <http://www.ktinet.com.tw/>

The information contained in this document is subject to change without prior notice.

Copyright (C) All Rights Reserved.

## **FCC NOTICE**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including the interference that may cause undesired operation.

## **CE NOTICE**

Marking by the symbol indicates compliance of this equipment to the EMC directive of the European Community. Such marking is indicative that this equipment meets or exceeds the following technical standards:

EMC Class A

EN55022:2006/A1:2007

EN61000-3-2:2006

EN61000-3-3:1995/A1:2001/A2:2005 Class A

EN 55024:1998/A1:2001/A2:2003

EN 61000-4-2:2001

EN 61000-4-3:2002/A1:2002

EN 61000-4-4:2004

EN 61000-4-5:2001


EN 61000-4-6:2003

EN 61000-4-8:2001

EN 61000-4-11:2001

# Specifications

---

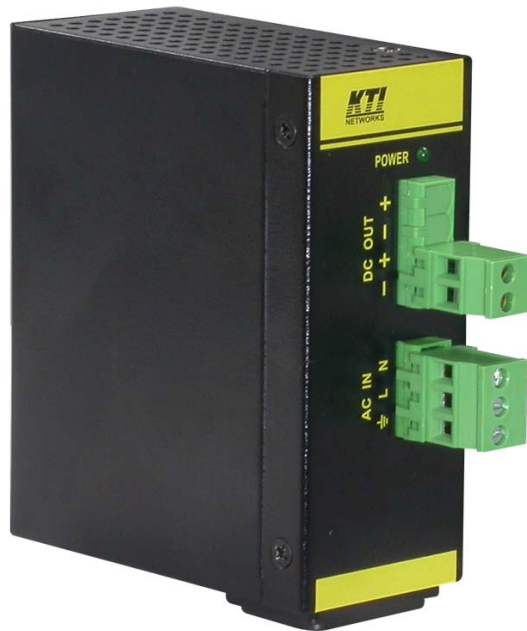

## **AC Power Input**

Interfaces	Type 1: IEC320 receptacle Type 2: Terminal block (L, N, PE)
Rated Input Voltage	100 ~ 240VAC
No load Consumption	< 0.75W

## **DC Power Output**

Interfaces	Type 1: Screw-type terminal block (Vout+, Vout-, Vout+, Vout-) Type 2: DC plug with bundled DC plug cable
Output Power	+12VDC (+/- 1%), 1.8A max.

## **Power Load**

100% @ -20°C ~ +50°C, 50% @ +60°C

## **Protection**

Short Circuit, Overload, Over Voltage

### **Mechanical**

Dimension (base)	40 x 80 x 95 mm (WxDxH)
Housing	Enclosed metal
Mounting	Din-Rail mounting, Panel mounting, Desktop mounting

### **Environmental**

Operating Temperature	- 20°C ~ + 60°C
Storage Temperature	- 30°C ~ + 85°C
Relative Humidity	10% ~ 90% non-condensing

### **Internal Power Module Approvals**

Safety Certification	UL60601-1 IEC60601-1 TUV EN60601-1 Certified
----------------------	--

### **Electrical Approvals**

FCC	Part 15 rule Class A
CE EMC	EN55022:2006/A1:2007 EN61000-3-2:2006 EN61000-3-3:1995/A1:2001/A2:2005 Class A EN 55024:1998/A1:2001/A2:2003 EN 61000-4-2:2001 EN 61000-4-3:2002/A1:2002 EN 61000-4-4:2004 EN 61000-4-5:2001 EN 61000-4-6:2003 EN 61000-4-8:2001 EN 61000-4-11:2001
Safety	LVD, IEC60950-1

### **MTBF**

400K Hours

# Installation

---

## Unpacking

The product package contains:

- The power supply unit
- One DC plug cable
- One product CD-ROM

## Safety Cautions

To reduce the risk of bodily injury, electrical shock, fire and damage to the product, observe the following precautions.

- Do not service any product except as explained in your system documentation.
- Opening or removing covers may expose you to electrical shock.
- Only a trained service technician should service components inside these compartments.
- If any of the following conditions occur, unplug the product from the electrical outlet and replace the part or contact your trained service provider:
  - The power cable, extension cable, or plug is damaged.
  - An object has fallen into the product.
  - The product has been exposed to water.
  - The product has been dropped or damaged.
  - The product does not operate correctly when you follow the operating instructions.
- Do not push any objects into the openings of your system. Doing so can cause fire or electric shock by shorting out interior components.
- Operate the product only from the type of external power source indicated on the electrical ratings label. If you are not sure of the type of power source required, consult your service provider or local power company.

## Din-Rail Mounting


Install the Din-Rail bracket on the rear panel as shown below:



Mount the device unit on a Din-Rail as shown below:



## Final Dimension after Installation

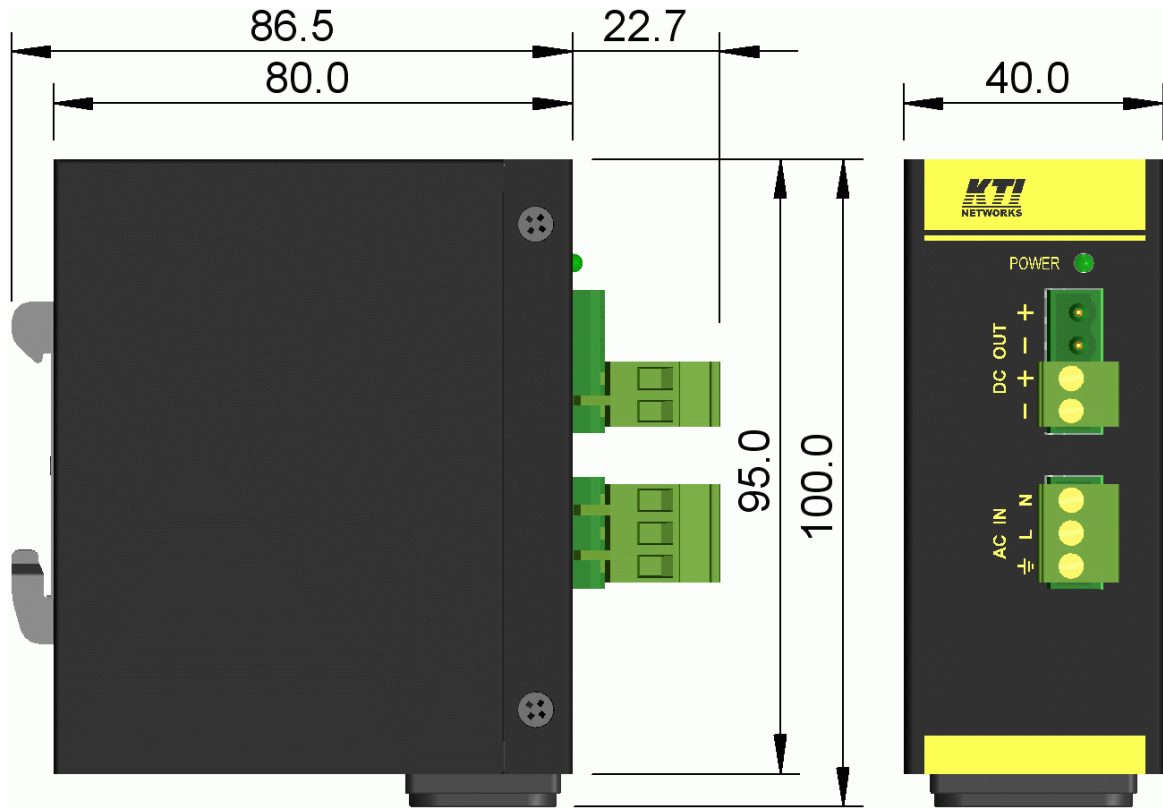

## Panel Mounting

An optional panel mounting bracket supports mounting the power supply on a plane surface securely.






Install the bracket onto the device unit as shown below and use two screw holes to fix the unit on a plane surface:




### Final Dimension after Installation

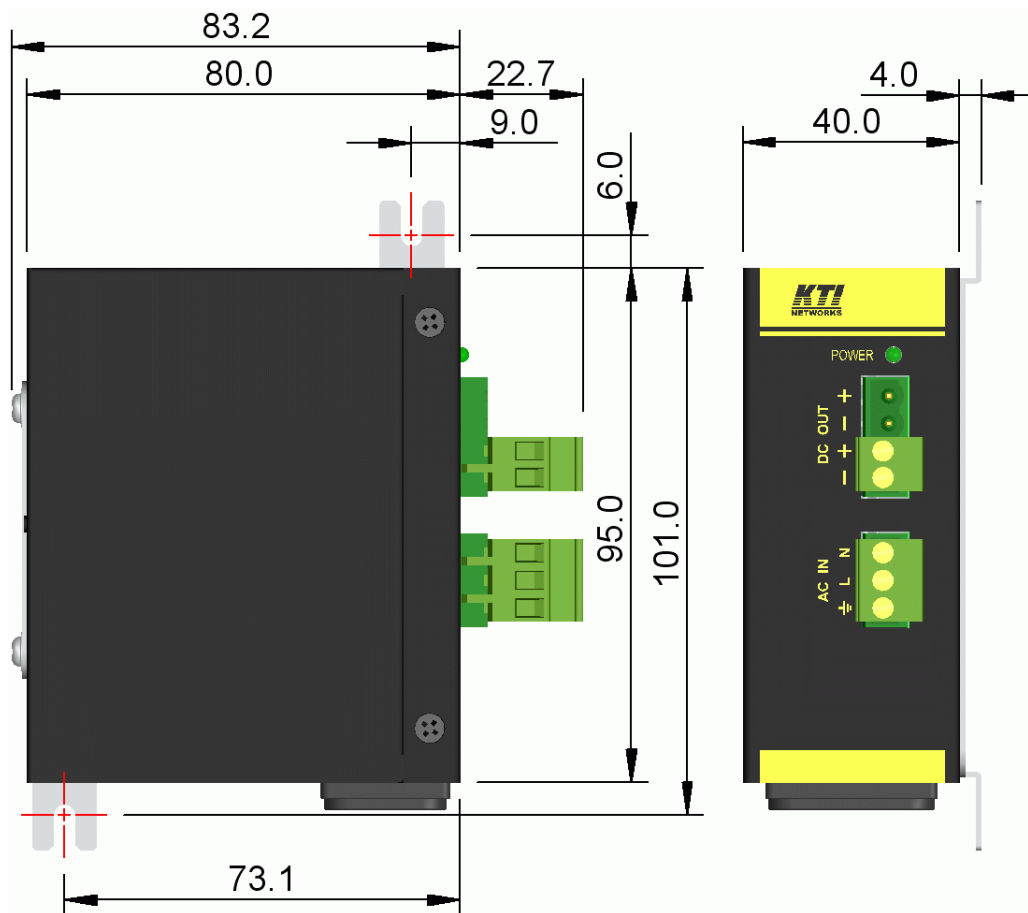

# AC Power Input


The power supply provides two types of power interfaces, IEC320 and terminal block for receiving AC power input.

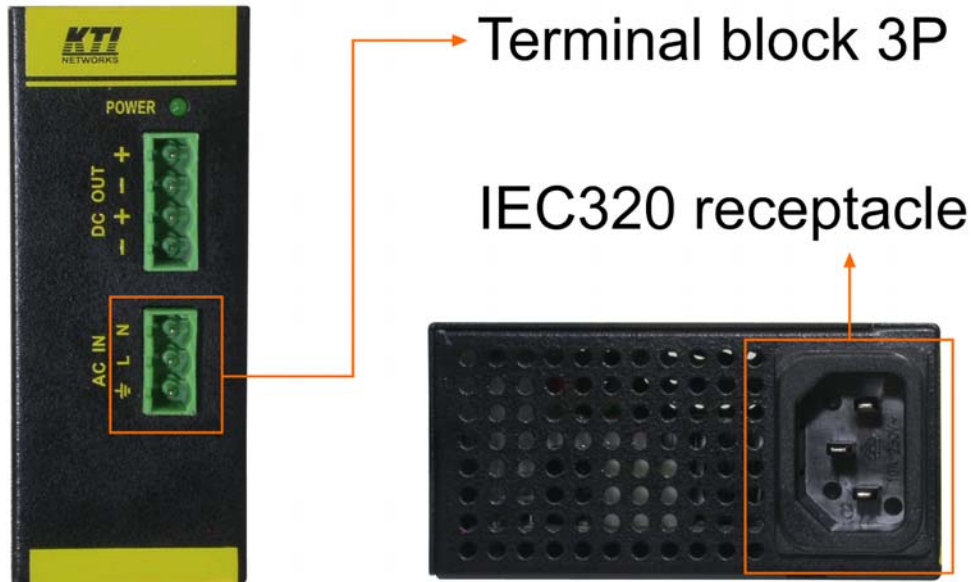

## Using Terminal Block

Use 3P terminal plug for AC power wires. Install the wires into the plug securely. The colors of the power wires are:

Contacts	Europe (IEC)	USA
L (Line)	Brown	Black
N (Neutral)	Blue	White
PE (Earth)	Green-Yellow	Green



Install the wired plug onto the AC socket properly. For safety purpose, use the provided yellow cap to cover the unused IEC320 receptacle.



### Using IEC320 Interface


One AC power cord which meets the specification of your country of origin is supplied in package. Plug the power cord into the IEC320 receptacle properly. For safety purpose, put the supplied caps on the unused AC terminal block.



# DC Power Output

---

The power supply provides two pairs of industrial terminal block connectors for installations and one typical DC plug support for commercial installation.

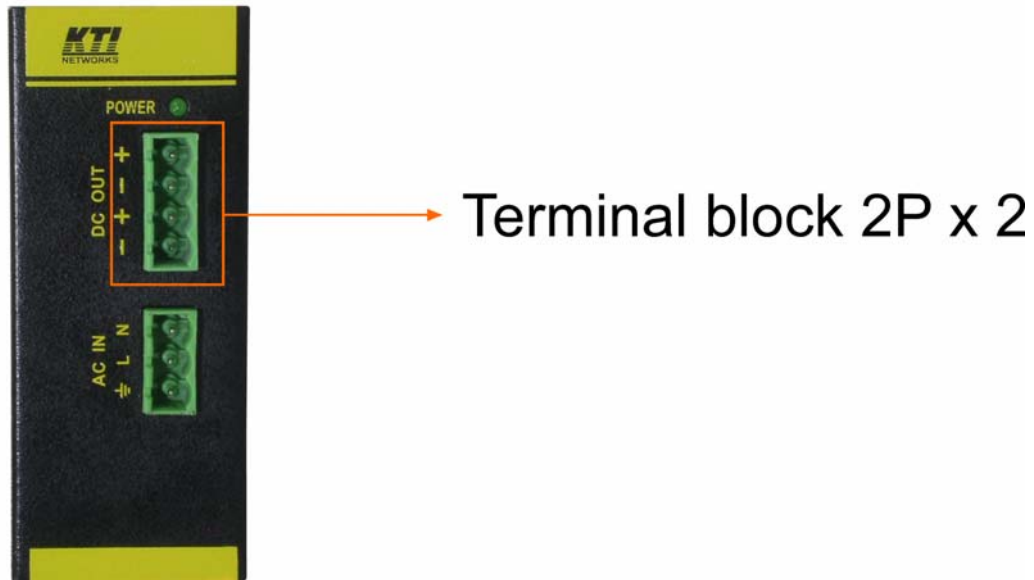

## Using Terminal Blocks

### DC OUT ( 2P x 2 Contacts)

$V_{out}+$  terminal

$V_{out}-$  terminal

$V_{out}+$  terminal

$V_{out}-$  terminal

( $V_{out}$ : +12VDC, 1.8A total max.)

Use the supplied 2P plug for DC power wires. Insert and screw the wires securely as shown below:



Power wire specification: 24~12AWG (IEC 0.5~2.5mm<sup>2</sup>)

Plug the wired DC plug into DC OUT socket as shown below and put cap on any unused DC OUT contacts.



## Using DC plug cable

To support the devices which have only DC IN Jack interface, one DC plug cable shown below is supplied.

### DC Plug Cable



Insert the cable into DC OUT terminal block of the power unit as illustrated below and uncover any unused contacts.



**An Example of supplying power to a device with DC Jack.**

