



NV-320DP

2 Giga LAN Over VDSL2 Extender with SFP

The NV-320DP is low cost Copper/Fiber to xDSL solution using the G.993.2 VDSL2 standard technology using only a single copper wire pair. With 1000Base-X SFP slot, NV-320DP is designed specifically for FTTdp/FTTC and supporting both symmetrical and asymmetrical transmission at up to 160/160Mbps and 2Mbps / 500Kbps at 3000 meters, this is a perfect solution to extend LAN to buildings, hotels, hospitals or any location outside the reach of 10/100/1000Base-T (Ethernet) or fiber optic.

Features


- Cost effective Copper/Fiber to xDSL bridge function for FTTdp/FTTC application
- Up to 160/160Mbps high bandwidth
- Maximum distance up to @ 3km (9842ft)
- Supports Compact size and DIN rail
- Selectable CO and CPE mode via DIP switch
- Selectable G. INP mode
- Selectable 8 band profile
- Supports CO/CPE LED indication
- Supports DIN-Rail (Optional) installation
- Supports Jumbo frame(MTU) 2K bytes on VDSL side

Specifications & Standard

Standard	Comply with IEEE 802.3ab, IEEE802.3u IEEE 802.3z
Interface	Connector: 10/100/1000Base-T RJ-45*2 1000X/SerDes SFP Slot*1
VDSL2 Interface	Comply with ITU-T G993.2 Connector: RJ-11/Terminal block DMT Encoding/PTM Transmission On-board surge protector MTU: 2K
4-position DIP Switch	Selectable CO or CPE mode Selectable Band profile Selectable G.INP
Certification	CE, FCC, RoHS Compliant

Indicators	LAN: Act/Link, PWR: Power Line: Act/Link, Line Mode: CO/CPE
Power	DC 12V via AC switching adapter
Power Consumption	3W Typical
Dimensions	124 x 93 x 27 mm (4.88" x 3.66" x 1.06")
Weight	0.34Kg
Temperature	0~50°C (Operating), -20~70°C (Storage)
Humidity	10 - 90% non-condensing
Optional accessories	Din Rail mounting plate

Application

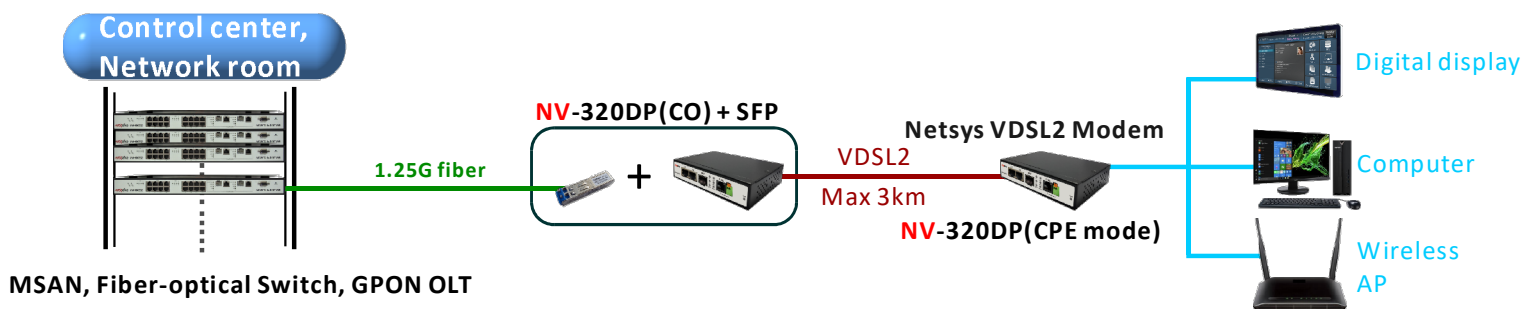

*Netsys reserves the right to change specifications without prior notice



NV-320DP

Www.netsys.com.tw

Sales@netsys.com.tw