

KS-SOHO-5
5-Port
10/100 SOHO Switch

User' s Guide

FCC Warning

This equipment has been tested and found to comply with the regulations for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with this user's guide, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

CE Mark Warning

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

VCCI Mark Warning

注意

この装置は、情報処理装置等電波障害自主規制協議会(VCCI)の基準に基づく第一種情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

P/N:6012-0721050

Rev.A1-01

ABOUT THIS GUIDE

Congratulations on your purchase of the 5-Port 10/100 SOHO Switch. This device integrates 100Mbps Fast Ethernet and 10Mbps Ethernet network capabilities in a highly flexible desktop package.

Purpose

This manual discusses how to install your 5-Port 10/100 SOHO Switch.

Terms/Usage

In this guide, the term “**Switch**” (first letter upper case) refers to your 5-Port 10/100 SOHO Switch, and “**switch**” (first letter lower case) refers to other Ethernet switches.

EXTERNAL COMPONENTS

This section identifies all the major external components of the hub. Both the front and rear panels are shown, followed by a description of each panel feature. The indicator panel is described in detail in the next chapter.

Front Panel

The figure below shows the front panels of the switch.



PWR:

This indicator lights green when the hub is receiving power, otherwise, it is off.

Link/Act:

This indicator light green when the port is connected to a station, if the indicator blinking will be transmitting or received data on the network.

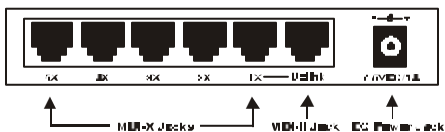
100M:

If this indicator light green, mean this port is connected to a 100M Fast Ethernet station. Otherwise, this indicators reminds off, mean this port is connected to a 10M Ethernet station.

FDX/COL:

This LED indicator light green when a respective port is in full duplex (FDX) mode. Otherwise, it is blinking when collisions are occurring on the respective port.

Rear Panel

**DC Power Jack:**

Power is supplied through an external AC power adapter. Check the technical specification section for information about the AC power input voltage.

Since the switch does not include a power switch, plugging its power adapter into a power outlet will immediately power it on.

MDI-X Jacks:

Use these jacks to connect stations to the hub. These are MDI-X (Medium-Dependent Interface, Cross-wired) jacks, which mean, you can use ordinary straight-through twisted-pair cables to connect user machines and servers to the hub through them. If you need to connect another device with an MDI-X jack, such as another hub or an Ethernet switch, you should use a crossover cable, or make the connection using the MDI-X jack (described below). For more information about crossover connections.

MDI-II Jack:

Use this jack to connect stations to the hub. This is MDI-II (Medium-dependent Interface, straight-wired) jack, which means you can connect the hub to a device with a MDI-X port using an ordinary straight-through cable, making a crossover cable unnecessary.

TECHNICAL SPECIFICATIONS

General	
Standards	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet ANSI/IEEE 802.3 NWay Auto-negotiation IEEE 802.3x Full duplex Flow Control
Protocol	CSMA/CD
Data Transfer Rate	Ethernet: 10Mbps (half duplex) 20Mbps (full-duplex) Fast Ethernet: 100Mbps (half duplex) 200Mbps (full- duplex)
Topology	Star
Network Cables	10BASET: 2-pair UTP Cat. 3,4,5, EIA/TIA- 568 100-ohm STP 100BASE-TX: 2-pair UTP Cat. 5, EIA/TIA-568 100-ohm STP
Number of Ports	5 x 10/100Mbps MDI-X ports
Uplink Port	MDI-II RJ-45 * 1, share with port 1

Physical and Environmental	
DC inputs	7.5VDC/1A
Power Consumption	7.5 watts. (max.)
Temperature	Operating: 0° ~ 50° C Storage: -10° ~ 70° C
Humidity	Operating: 10% ~ 90% Storage: 5% ~ 90%
Dimensions	116 x 70 x 25 mm (W x H x D)
EMI:	FCC Class B, CE Mark B, VCCI-B
Performance	
Transmission Method:	Store-and-forward
RAM Buffer:	128KBytes per device
Filtering Address Table:	1K entries per device
Packet Filtering/Forwarding Rate:	10Mbps Ethernet: 14,880/pps 100Mbps Fast Ethernet: 148,800/pps
MAC Address Learning:	Automatic update